




LCU6-11CU-0100-S

CAT.6 LAN CABLE

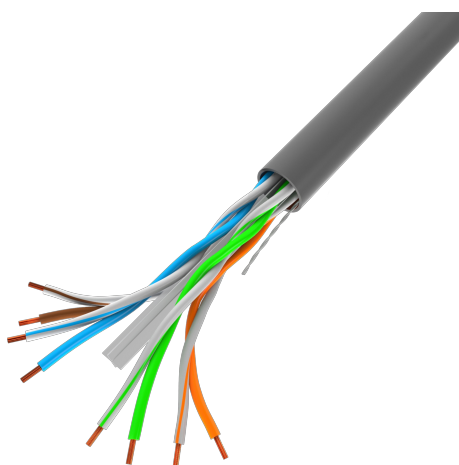

PRODUCT FEATURES:

- Compliance with parameters tested with a Fluke tester
- Solid wires made from pure copper
- Cable without shielding – UTP
- Designed for internal use

PRODUCT SPECIFICATION:

ICT category	Cat. 6
Shielding type	U/UTP
Conductor material	Copper (CU)
Coating material	PVC
Reaction to fire category (Euroclass)	Eca
Structure of the conductor	Single-wire
Conductor thickness	0,52 mm
AWG	24
HDPE isolation	0,94 mm
Lagging thickness	0,55 mm
Outer diameter	5,8 mm
Maximum operating frequency	up to 250 MHz
Cable length	100 m
Colour	Gray