
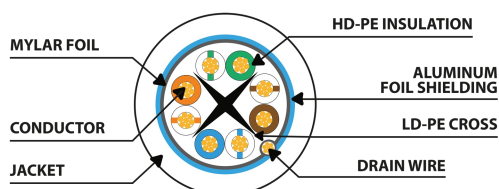


PCF6-10CC-0025-G

PATCH CABLE CAT.6

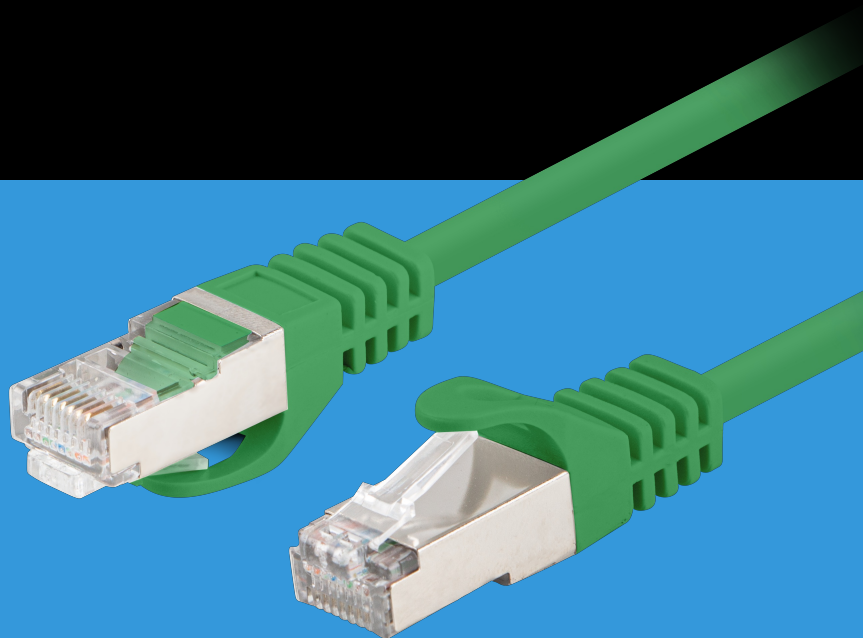

PRODUCT FEATURES:

- F/UTP shielding type – Aluminum foil shield on wire
- Category compliance confirmed by Fluke tester
- Stranded wires made from CCA

PRODUCT SPECIFICATION:

ICT category	Cat. 6
Shielding type	F/UTP
Cable length	25 cm
Conductor material	Copper plated (CCA)
Coating material	PVC
AWG	26
Conductor thickness	7 x 0.16 mm
HDPE isolation	0,88 mm
Outer diameter	5,7 mm
Maximum operating frequency	up to 250 MHz
Colour	Green

